

Lawler Temflow 9600 TEM 1 For Photographic & X-Ray Developing


This unit consists of one Lawler PX-9600 thermostatic mixing valve with integral shut-off and with sliding parts of stainless steel and actuated by a liquid-filled hydraulic thermostat. Mixing valve to be adjustable between all cold and 105°F temperatures.

hot inlet, one union and combination volume control stop and check valve with removable strainer on the cold water inlet. On the tempered water outlet and "on-off" valve, vacuum breaker and thermometer. It is completely factory assembled and tested and includes all necessary nipples and fittings.

The assembly consists of one union end combination stop and check valve with removable strainer on the

CAPACITY G.P.M. AT 45. P.S.I.	PIPE SIZE		ORDER NUMBER	A	B	C	D	E	F	G	H
	INLET	OUTLET									
1/2 to 2 1/2	1/2"	1/2"	TEM1-9600-A	4 3/4"	2 1/2"	5 1/4"	1 1/2"	14"	13"	1 3/4"	3 3/4"
1 to 5	1/2"	1/2"	TEM1-9600-B	4 3/4"	2 1/2"	5 1/4"	1 1/2"	14"	13"	1 3/4"	3 3/4"
5 to 10	1/2"	1/2"	TEM1-9600-C	4 3/4"	2 1/2"	5 1/4"	1 1/2"	14"	13"	1 3/4"	3 3/4"
10 to 20	3/4"	3/4"	TEM1-9600-D	4 3/4"	3"	6 3/4"	1 1/2"	16"	15"	1 1/2"	4 1/8"

FLOW CAPACITIES - SERIES 9200 & 9600

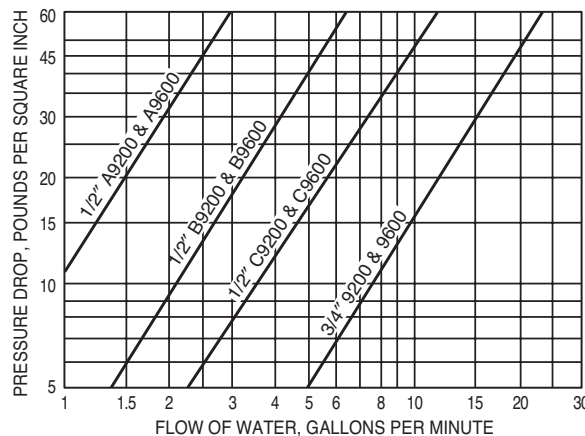

MANUFACTURING CO., INC.

5330 East 25th Street
Indianapolis, Indiana 46218
Phone (317) 261-1212
Fax (317) 261-1208

Design and specification subject to change without notice.