


Lawler Series 9700 For Photographic & X-Ray Developing

This unit consists of one Lawler PX-9700 combination thermostatic and pressure balanced mixing valve. The mixing valve consists of independent positive pressure balancing section and independent thermostatic temperature control section with sliding parts of stainless steel. It is actuated by a liquid-filled hydraulic thermostat, all contained in one compact bronze body. The mixing valve is to have integral shut-off and to be adjustable between all cold and 105°F temperatures.

The assembly consists of one union end combination stop and check valve, with removable strainer on the hot inlet, one union and combination volume control stop and check valve with removable strainer on the cold water inlet. On the tempered water outlet are an "on-off" valve, vacuum breaker and thermometer. It is completely factory assembled and tested and includes all necessary nipples and fittings.

ORDER NUMBER		CAPACITY G.P.M. AT 45 P.S.I.	PIPE SIZE		A	B	C
PLAIN BRONZE	CHROME PLATE		INLET	OUTLET			
A9892154	<input type="checkbox"/>	A9792154	<input type="checkbox"/>	1/2 - 2 1/2	1/2"	1/2"	8" 8" 11 1/4"
B9892154	<input type="checkbox"/>	B9792154	<input type="checkbox"/>	1 - 5	1/2"	1/2"	8" 8" 11 1/4"
C9892154	<input type="checkbox"/>	C9792154	<input type="checkbox"/>	5 - 10	1/2"	1/2"	8" 8" 11 1/4"
9892156	<input type="checkbox"/>	9792156	<input type="checkbox"/>	15 - 20	3/4"	3/4"	9 1/2" 8 5/8" 13"

FLOW CAPACITIES - SERIES 9700

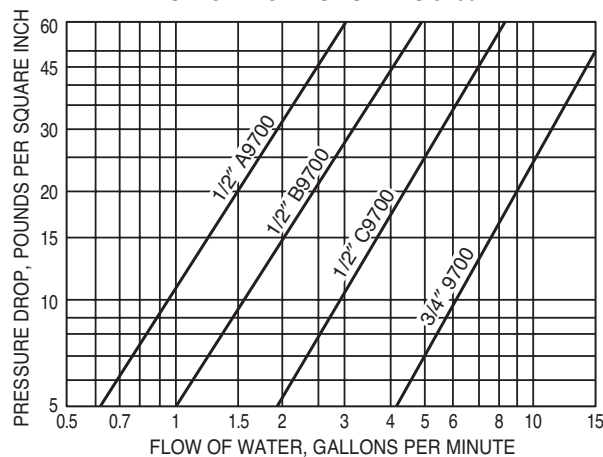

MANUFACTURING CO., INC.

5330 East 25th Street
Indianapolis, Indiana 46218
Phone (317) 261-1212
Fax (317) 261-1208

Design and specification subject to change without notice.